


EXPLODED DRAWING

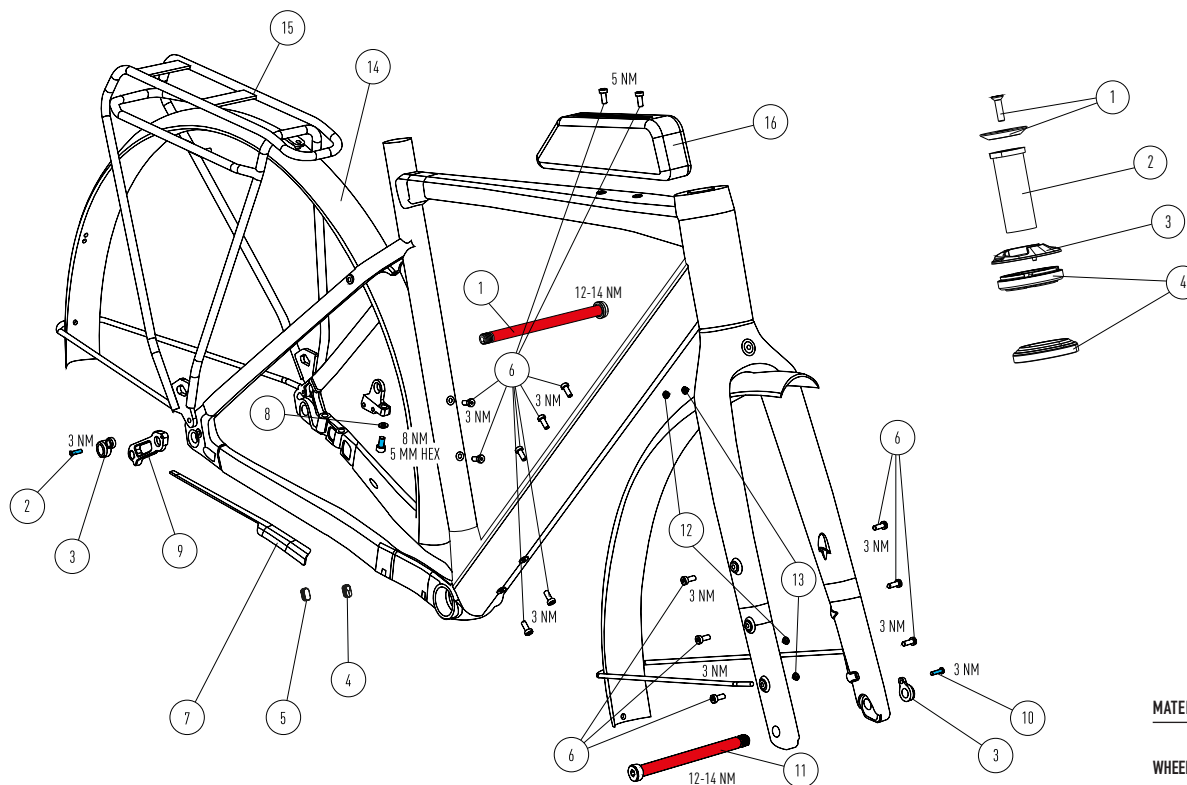

ATLAS

PP2105 | AL

POS	PART #	PART NAME	QTY
01	KD160221016	REAR AXLE	1
02	KD325919175	DCW M4 X 14 SCREW	1
03	KD325921092	THRU AXLE NUT	2
04	KD325921014	DROPPER PLUG (WHEN DROPPER MOUNTED)	1
05	KD325921013	DROPPER PLUG BLIND (WHEN NO DROPPER IS MOUNTED)	1
06	KD199119008	M5X12	15
07	KD325921228	CHAINSTAY PROTECTOR	1
08	AM325921086	KICKSTAND ADAPTER KIT (FOR EQUIPPED SPEC)	1
09	KD325919141	SHIMANO DIRECT MOUNT HANGER	1
10	KD325917005	DCW M4 X 10 SCREW	1
11	KD160221009	FRONT AXLE	1
12	KD70525	LIGHT CABLE PLUG	1
13	KD11596001	LIGHT CABLE PLUG BLIND	1
14	AM140121004	F&R FENDER SET	1
15	AM130120022	CARRIER SET	1
16	AM325921244	TOP TUBE BAG SET (ONLY FOR ATLAS 6.9 AND 6.8)	1

STEM

1	ACROS PART	ACROS TOP CAP WITH THE SCREW	1
2	KD120421027	EXPANDER 70 MM X Ø 22,5 MM	1
3	ACROS PART	ACROS TOP CAP IS52/OD62	1
4	ACROS PART	ACROS, AC4052 LOWER BEARING, AC4252 TOP BEARING CABLE ROUTING COMPRESSION RING, IPS UPPER, IPS LOWER	1

MATERIAL	ALLOY 7005
WHEELSIZE	700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 47 MM 27.5" / 12 X 110 - 27.5" / 12 X 148 / MAX TIRE WIDTH 53 MM 700C / 12 X 110 - 700C / 12 X 148 / MAX TIRE WIDTH 40 MM WITH FENDERS
HEADSET	UPPER IS Ø52 MM - LOWER IS Ø52 MM
FORK	700C - LENGTH 425 MM - RAKE 50 MM
SEATPOST / SEATCLAMP	Ø27,2 MM - Ø31,8 MM - MINIMUM INSERT 100 MM
MAX SEATPOST INSERTION	XS: 220 MM S: 250 MM M: 285 MM L: 315 MM XL: 340 MM
FRONT BRAKEMOUNT	FLATMOUNT Ø160 MM - MAX. ROTOR Ø180 MM
FRONT AXLE	110 MM / Ø12 MM / PITCH 1,75
REAR BRAKEMOUNT	FLATMOUNT Ø160 MM - MAX. ROTOR Ø180 MM
REAR AXLE	175 MM / Ø12 MM / PITCH 1,75
RD HANGER	FOCUS
FD MOUNT	BAND TYPE
BOTTOM BRACKET	BSA68 MM
CHAINRING	MAX CHAINRING SIZE 1BY: 42 CHAINLINE: 49,7 MM (SHIMANO) MAX CHAINRING SIZE 1BY: 40 CHAINLINE: 45 MM (SRAM) MAX CHAINRING SIZE 2BY: 46/30 CHAINLINE: 47 MM (SHIMANO) MAX CHAINRING SIZE 2BY: 43/30 CHAINLINE: 47,5 MM (SRAM)
KICK STAND MOUNT	WITH ADAPTOR 18 MM
MAX SYSTEM WEIGHT	120 KG